
## **106 Series Surface Mount**

A01 - Floor to Floor A02 - Floor to Wall



Movement Rating ± 25%




- > Dual durometer seal provides secure fit and optimal flexibility
- Seals absorb limited serviceable seismic movement
- Designed for renovation and surface mount installations
- Adaptable to concrete, epoxy, vinyl and caret finishes
- Seamlessly integrates with the following wall and ceiling systems
- Easy to clean flush seals. No dirt or water traps
- Snap-fit design for easy on site assembly
- Mill finish aluminum

 Standard seal colors: black, beige, gray, off white and bright white. Custom colors available upon request.

Application	System	W		H1		H2		S		В		Movement +/-			
		Joint Width		Frame Height 1		Height 2		Sightline		Blockout		Horizontal		Vertical	
		US	mm	US	mm	US	mm	US	mm	US	mm	US	mm	US	mm
Floor to Floor	106-A01-025	1"	25	5/8"	16	1/4"	6	1"	25	*	*	1/4"	6	1/4"	6
	106-A01-038	1 1/2"	38	5/8"	16	1/4"	6	1 1/2"	36	*	*	3/8"	10	3/8"	10
	106-A01-050	2"	51	1"	25	1/4"	6	2"	47	*	*	1/2"	13	1/2"	13
	106-A01-075	3"	76	1 1/8"	28	1/4"	6	3"	73	*	*	3/4"	19	3/4"	19
Floor to Wall	106-A02-025	1"	25	5/8"	16	1/4"	6	1"	25	*	*	1/4"	6	1/4"	6
	106-A02-038	1 1/2"	38	5/8"	16	1/4"	6	1 1/2"	36	*	*	3/8"	10	3/8"	10
	106-A02-050	2"	51	1"	25	1/4"	6	2"	47	*	*	1/2"	13	1/2"	13
	106-A02-075	3"	76	1 <sup>1</sup> /8"	28	1/4"	6	3"	73	*	*	3/4"	19	3/4"	19


IPC.653/REV.5



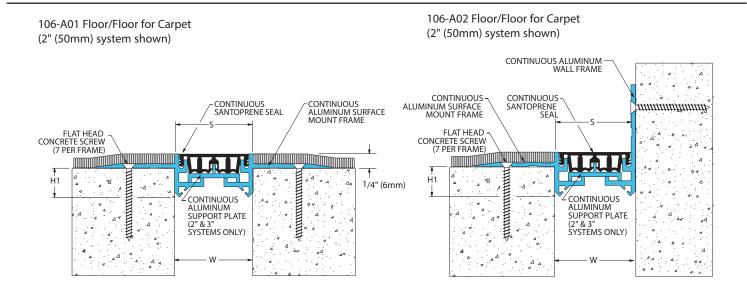

## 106 Series Options

Fire Mineral Wool & Sealant Fire Barrier System (106-A01-025 system shown)

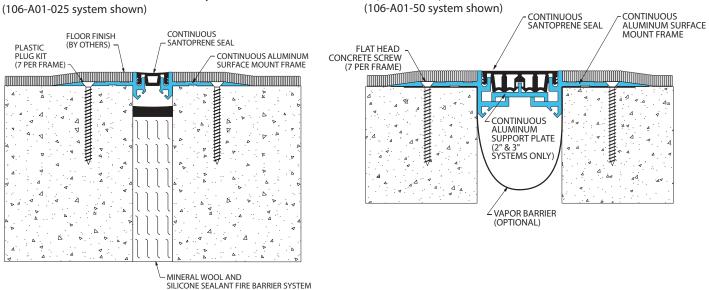

Vapor Barrier System

inpro.

(OPTIONAL)