

# 107 Series New to Existing

A01 - Floor to Floor



**Movement Rating ± 25%**

## Product Guide



Thermal



Interior



Fire Rated  
Option



Vapor Barrier  
Option



ADA  
Compliant

- ▶ Dual durometer seal provides secure fit and optimal flexibility
- ▶ Seals absorb limited serviceable seismic movement
- ▶ Designed for retrofits, additions and renovations where blackout occurs on one side only
- ▶ Adaptable to many floor finishes including concrete, epoxy, ceramic tile, vinyl, carpet, marble and stone
- ▶ Seamlessly integrates with the following wall and ceiling systems
- ▶ Easy to clean flush seals no dirt or water traps
- ▶ Snap-fit design for easy on site assembly
- ▶ Mill finish aluminum
- ▶ Standard seal colors: black, beige, gray, off white and bright white. Custom colors available upon request.

Wall	Ceiling
101-A07/A09	101-A07/A09
104-A07/A09	104-A07/A09
112-A07/A09	112-A07/A09
113-A07/A09	113-A07/A09

Application	System	W		H1		H2		S		B		Movement +/-			
		Joint Width		Frame Height 1		Height 2		Sightline		Blockout		Horizontal		Vertical	
		US	mm	US	mm	US	mm	US	mm	US	mm	US	mm	US	mm
Floor to Floor	107-A01-025	1"	25	1 1/2"	38	*	*	2 7/8"	73	2 1/2"	64	1/4"	6	1/4"	6
	107-A01-038	1 1/2"	38	1 1/2"	38	*	*	3 5/16"	84	2 1/2"	64	3/8"	10	3/8"	10
	107-A01-050	2"	51	1 1/2"	38	*	*	3 3/4"	95	2 1/2"	64	1/2"	13	1/2"	13
	107-A01-075	3"	76	1 1/2"	38	*	*	4 3/4"	121	2 1/2"	64	3/4"	19	3/4"	19

Standard frame height for recessed side 1 1/2" (38mm), 25mm and 50mm available)

IPC.808/REV.9

inpro.com • 800.222.5556 • 262.679.9010


World Headquarters S80 W18766 Apollo Drive, Muskego, WI 53150 USA

**inpro**®

# 107 Series

## New to Existing Floor Systems


107-A01 Floor/Floor  
(1" (25mm) system shown)

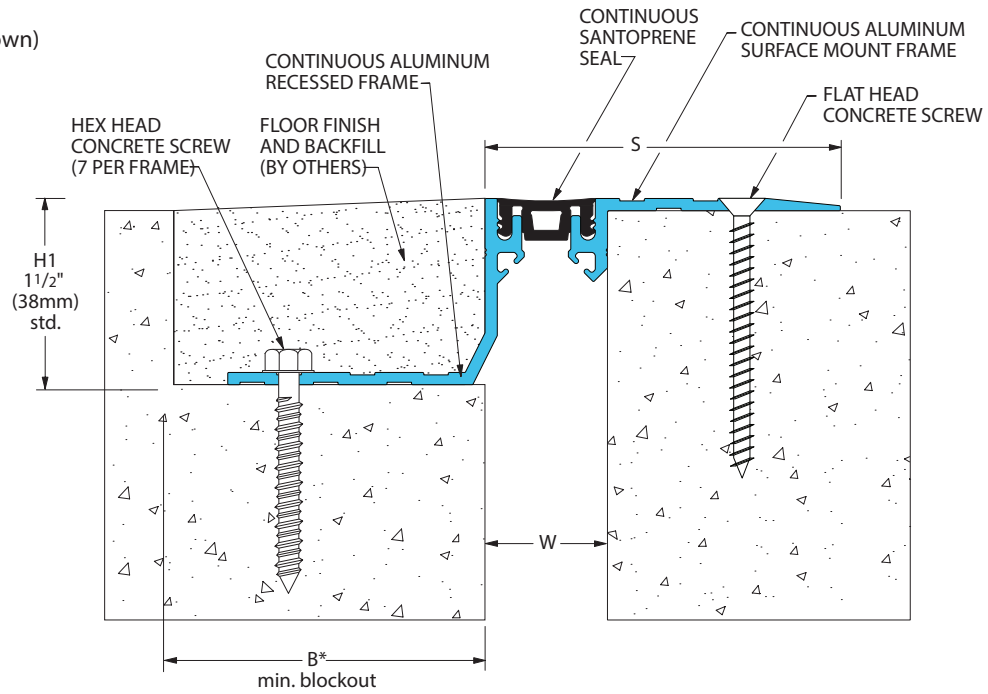

# 107 Series

## Options

Vapor Barrier  
(107-A01-050 system shown)

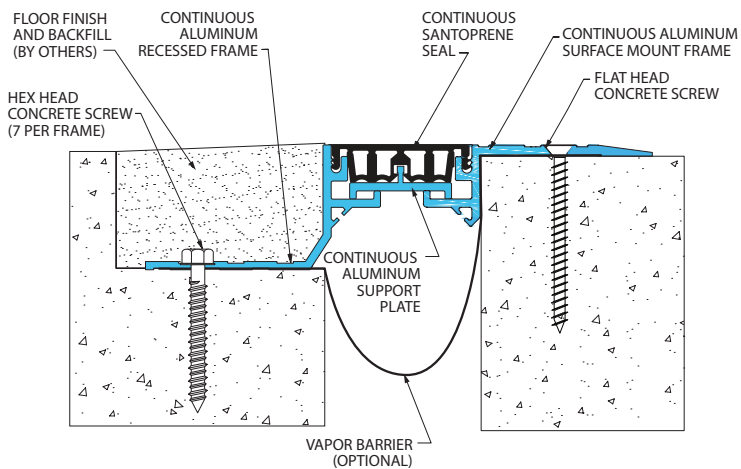

Fire Barrier  
(107-A01-025 system shown)

