

Palladium® Rigid Vinyl Kickplates



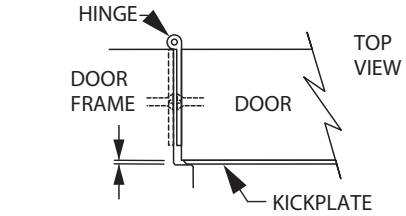

IF CLEARANCE ALLOWS KICKPLATE CAN BE FULL WIDTH OF DOOR



Product Details

- Scratch and stain resistant rigid vinyl
- Cut to your exact specifications
- Fabricated with factory beveled edges

Options

- Available in .040" (1mm), .060" (1.5mm) and .080" (2mm) thicknesses
- Available in Inpro Standard Solid Colors, Woodgrains, Metallics, and Patterns

Testing & Certifications

- UL-723 (ASTM E-84) Class A Classified
- Self Extinguishing: Tested in accordance with the procedures specified in ASTM D-635-74
- Impact Strength: Tested in accordance with the procedures specified in ASTM D-256-90b
- Impact Resistance: Tested in accordance with applicable provisions of ASTM F 476-84
- Chemical & Stain Resistance: Tested in accordance with applicable provisions of ASTM D-543
- ASTM G-21 and ASTM G-22 Tested does not support fungal or bacterial growth.
- Tested and results filed in compliance with article 15, part 1120 of the New York State uniform fire prevention and building code. DOS # 09960-930504-4001
- Meets UL GREENGUARD Gold low-VOC emission standards. UL GREENGUARD Gold Certification ensures that products are acceptable for use in places such as schools and healthcare facilities, and that they comply with CDPH Standards.

CLASSIFIED UL | ASTM INTERNATIONAL | GREENGUARD GOLD

IPC.3720/REV.10

135-139 Northcorp Blvd, Broadmeadows VIC 3047
03 9334 5911
acculine.com.au