

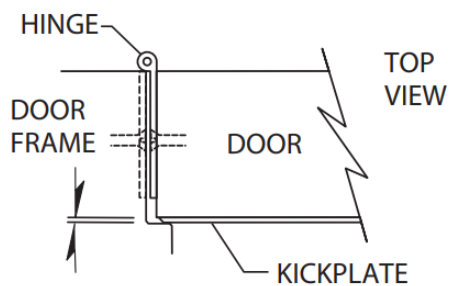


# Palladium Rigid Vinyl Kickplates

---

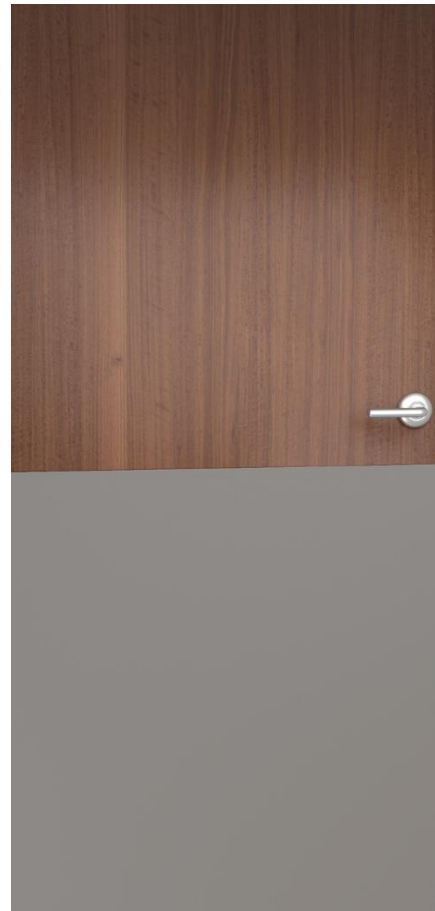

IF CLEARANCE ALLOWS  
KICKPLATE CAN BE  
FULL WIDTH OF DOOR

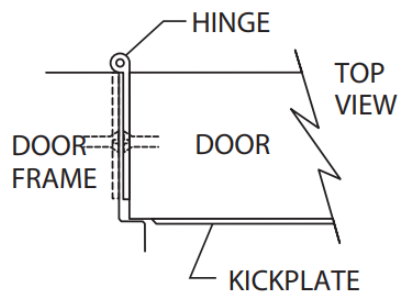

- Available in 1mm, 1.5mm and 2mm thicknesses
- Scratch and stain resistant rigid vinyl
- UL Classified for cladding materials
- Cut to your exact specifications

# Palladium Rigid Vinyl Kickplates

## PART 1 - GENERAL

### 1.01 SUMMARY

A. Kickplates for door protection

### 1.02 SECTION INCLUDES

A. Palladium® Rigid Vinyl Kickplates

### 1.03 REFERENCES

- A. American Society for Testing and Materials (ASTM)
- B. National Building Code of Canada (NBC)
- C. National Fire Protection Association (NFPA)
- D. Society of Automotive Engineers (SAE)
- E. Underwriters Laboratory (UL)
- F. Underwriters Laboratory of Canada (ULC)
- G. Underwriters Laboratory, Canada Accepted (cUL)
- H. Uniform Building Code (UBC)

### 1.04 SYSTEM DESCRIPTION

A. Performance Requirements: Provide Palladium® Rigid Vinyl Kickplates that conform to the following requirements of regulatory agencies and the quality control of IPC Door and Wall Protection Systems™, InPro Corporation.

1. Fire Performance Characteristics: Provide UL Classified kickplates conforming with NFPA Class A fire rating. Surface burning characteristics, as determined by UL-723 (ASTM E-84), for kickplates installed with 3M Fastbond 30, shall be flame spread of 10 and smoke development of 95-140 for 1mm thick material or flame spread of 15 and smoke development of 300 for 1.5mm thick material. Provide ULC (Canada) listed kickplates conforming to the requirements of the National Building Code of Canada 2010, Subsection 3.1.13. Surface burning characteristics, as determined by CAN/ULC-S102.2, shall be flame spread of 15 and smoke developed of 30.

2. Fire Performance Characteristics: Provide UL Classified Cladding Material for fire door and fire door frames intended for application on listed door frames used with hollow metal and steel covered composite type fire doors rated up to 3 hours in accordance with UL 10B. Provide cUL (Canada accepted) Cladding Material intended for application on listed fire door frames used on hollow metal and steel composite type fire doors rated up to 3 hours in accordance with CAN4-S104-M80.

3. Fire Performance Characteristics: Provide UL Classified Cladding Material for doors and door frames intended for application on classified door frames used with wood composite and wood core type fire doors rated up to 1-1/2 hours in accordance with UL 10B. Provide cUL (Canada accepted) Cladding Material intended for application on classified wood composite and wood core type fire doors rated up to 1-1/2 hours in accordance with CAN4-S104-M80.

4. Self-extinguishing: Provide kickplates with a CC1 classification, as tested in accordance with the procedures specified in ASTM D-635-74, Standard Test Method for Rate of Burning and/or Extent and Time of Burning of Self-Supporting Plastics in a Horizontal Position, as referenced in UBC 52-4-1988.

5. Provide sheet materials that have been tested and results filed in compliance with article 15, part 1120 of the New York State uniform fire

prevention and building code. DOS # 09960-930504-4001.

6. Impact Strength: Provide rigid vinyl sheet materials that have an Impact Strength of 30.4 ft-lbs/inch of thickness as tested in accordance with the procedures specified in ASTM D-256-90b, Impact Resistance of Plastics.

7. Chemical and Stain Resistance: Provide kickplates that show resistance to stain when tested in accordance with applicable provisions of ASTM D-543.

8. Fungal and Bacterial Resistance: Provide rigid vinyl that does not support fungal or bacterial growth as tested in accordance with ASTM G-21 and ASTM G-22.

9. Colour Consistency: Provide components matched in accordance with SAE J-1545 - (Delta E) with a colour difference no greater than 1.0 units using CIE Lab, CIE CMC, CIE LCh, Hunter Lab or similar colour space scale systems.

### 1.05 SUBMITTALS

A. Product Data: Manufacturer's printed product data for each type of Palladium® Rigid Vinyl Kickplates specified.

B. Detail Drawings: Mounting details with the appropriate adhesives for specific project substrates.

C. Samples: Verification samples of rigid vinyl kickplates, 203mm square, of each type and colour indicated.

D. Manufacturer's Installation Instruction: Printed installation instructions for rigid vinyl kickplates.

### 1.06 DELIVERY, STORAGE AND HANDLING

A. Deliver materials in unopened factory packaging to the jobsite

B. Inspect materials at delivery to assure that specified products have been received.

C. Store in original packaging in a climate-controlled location away from direct sunlight.

### 1.07 PROJECT CONDITIONS

A. Environmental Requirements: Products must be installed in an interior climate-controlled environment.

### 1.08 WARRANTY

A. Standard IPC Limited Lifetime Warranty against material and manufacturing defects.

## PART 2 - PRODUCTS

### 2.01 SUPPLIER

A. Acculine Architectural Systems: 135-139 Northcorp Blvd, Broadmeadows VIC 3047, Telephone: (03) 9334 5911, www.acculine.com.au

### 2.02 MANUFACTURER

A. Acceptable Manufacturer: IPC Door and Wall Protection Systems™, InPro Corporation, PO Box 406 Muskego, WI 53150 USA; Telephone: 800-222-5556, Fax: 888-715-8407, Internet address: <http://www.inprocorp.com>

B. Substitutions: Not permitted

C. Provide all Palladium® Rigid Vinyl Kickplates and wall protection from a single source.

### 2.03 MANUFACTURED UNITS

A. Kickplates

1. Palladium® Rigid Vinyl Kickplates Options

Item # Thickness:

KP4 .040" = 3/64" (1mm)-standard

KP6 .060" = 1/16" (1.5mm)-standard

Size: Indicated on door schedule in construction drawings.

Backing: Adhesive backed.

Unbacked: 3M Fastbond 30 recommended contact cement.

### 2.04 MATERIALS

A. Vinyl: Palladium® Rigid Vinyl Kickplates shall be manufactured from chemical and stain resistant polyvinyl chloride with the addition of impact modifiers. No plasticizers shall be added (plasticizers may aid in bacterial growth).

### 2.05 FINISHES

A. Colour or pattern of Palladium® Rigid Vinyl Kickplates to be selected by the architect from the IPC finish selection. Surface shall have a velvet texture or a smooth finish.

## PART 3 - EXECUTION

### 3.01 EXAMINATION

A. Examine areas and conditions in which the kickplate systems will be installed.

1. Complete all finishing operations, including painting, before beginning installation of kickplate system materials.

B. Door surface shall be dry and free from dirt, grease and loose paint.

### 3.02 PREPARATION

A. General: Prior to installation, clean substrate to remove dust, debris and loose particles.

### 3.03 INSTALLATION

A. General: Locate the kickplate as indicated on the approved detail drawing for the appropriate substrate and in compliance with the IPC installation instructions. Install kickplate level and plumb at the height indicated on the drawings.

B. Installation of Palladium® Rigid Vinyl Kickplates  
1. Contact Cement: Adhere to substrate with Fastbond 30, a non-flammable, high strength, water-dispersed contact adhesive, with very little odour. Smooth roll surface.

2. Factory Applied Adhesive: Adhere to substrate with manufacturer applied self-stick adhesive. Smooth roll surface.

### 3.04 CLEANING

A. At completion of the installation, clean surface in accordance with the IPC clean up and maintenance instructions.