JL Series

Insulated Vapor Barrier

Wall to Wall
Wall to Corner
Roof to Roof
Roof to Wall



Movement Rating ± 90%

Product Guide

Thermal | Seismic | Exterior | Weather Resistant | Fire Rated Option

- Exterior grade moisture barrier for horizontal and vertical building applications
- Can be mounted behind a wide range of expansion joint cover systems
- Maintains an R-value equivalent to the exterior wall systems in your project
- Consists of nylon-reinforced 45 mil thick EPDM membranes sandwiching commercial grade ECObatt insulation which is then adhered and mechanically pinned to form a seismic-capable assembly
- Product is provided complete with male/females ends and high-grade 60mil EPDM flashing
- Third Party tested under ASTM E283/ E330/ E331 for Air, Water, and Structural integrity. Complies with many hurricane-level lateral load testing requirements.
- Third Party tested under ASTM 1361.11 for Thermal Performance requirements.

Application	System	W Joint Width		H Insulated Vapor Barrier Depth		Movement ± Compression/Expansion	
		US	mm	US	mm	US	mm
WALL TO WALL WALL TO CORNER ROOF TO ROOF ROOF TO WALL	JL004-IVB	4″	102	5″	127	3 5/8″	92
	JL006-IVB	6″	152	5″	127	5 7/16″	138
	JL008-IVB	8"	203	6″	152	7 3/16″	183
	JL010-IVB	10″	254	7″	178	9″	229
	JL012-IVB	12″	305	8″	203	10 13/16″	275
	JL018-IVB	18″	457	10"	457	16 3/16″	411
	JL024-IVB	24″	610	12″	305	21 5/8″	549
	JL028-IVB	28″	711	14″	356	25 1/4″	641


IPC.776/REV.4


135-139 Northcorp Blvd, Broadmeadows VIC 3047
03 9334 5911
acculine.com.au

JL Series


Insulated Vapor Barrier

JL Series
Secured with EJ Cover Frames

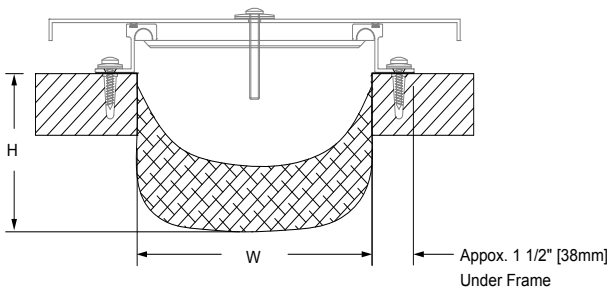

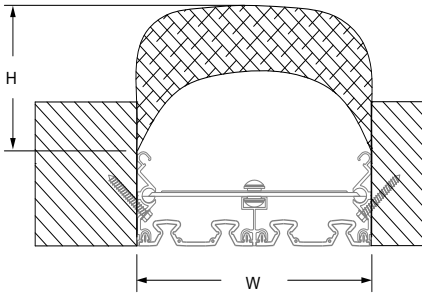

JL Series
Secured with Termination Bar

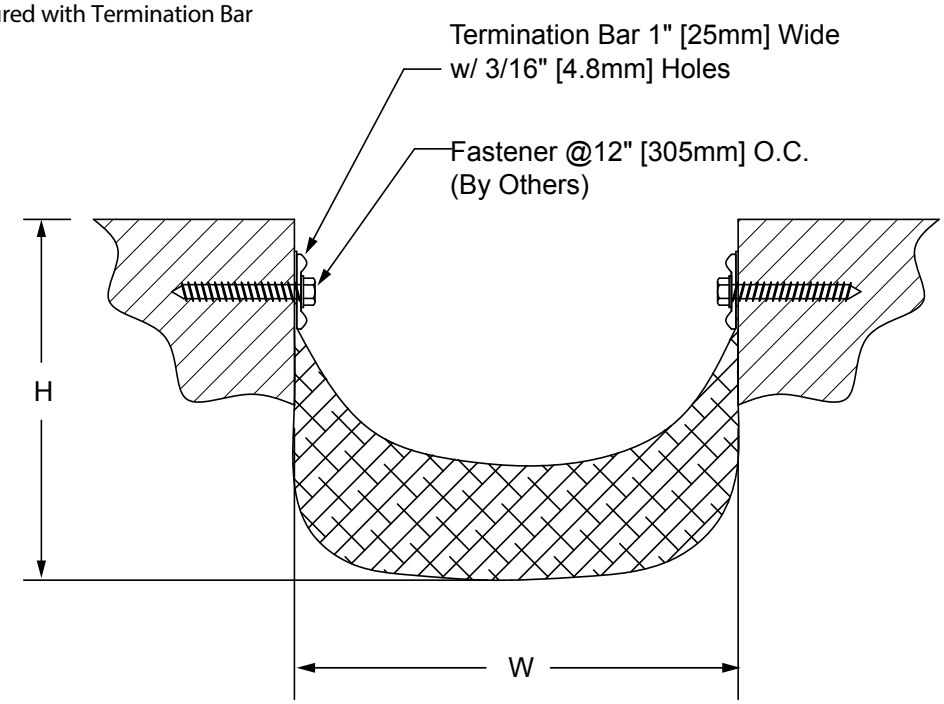

135-139 Northcorp Blvd, Broadmeadows VIC 3047
03 9334 5911
acculine.com.au